
KELLY XL

Chandelier

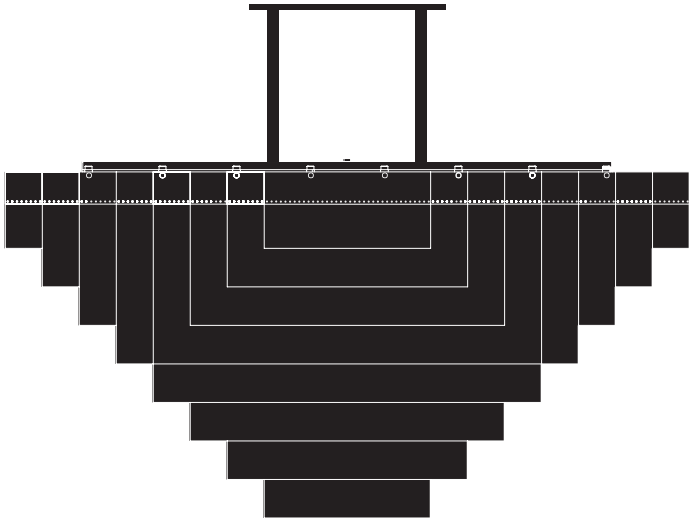

GABRIEL SCOTT
est 2012

www.GabrielScott.com

KELLY XL
Chandelier

1/7

A bold and elegant sculptural light fixture, the KELLY Chandelier holds over a half-kilometer of reflective chain to generate a staggered and diametrically exquisite geometrical form. Light glimmers throughout the chain to create a soft glistening cloud effect.

Available in black steel with black and silver chain, or entirely in brass.

All Gabriel Scott pieces are handmade in Canada.



GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

KELLY XL
Chandelier






GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

KELLY XL
Chandelier



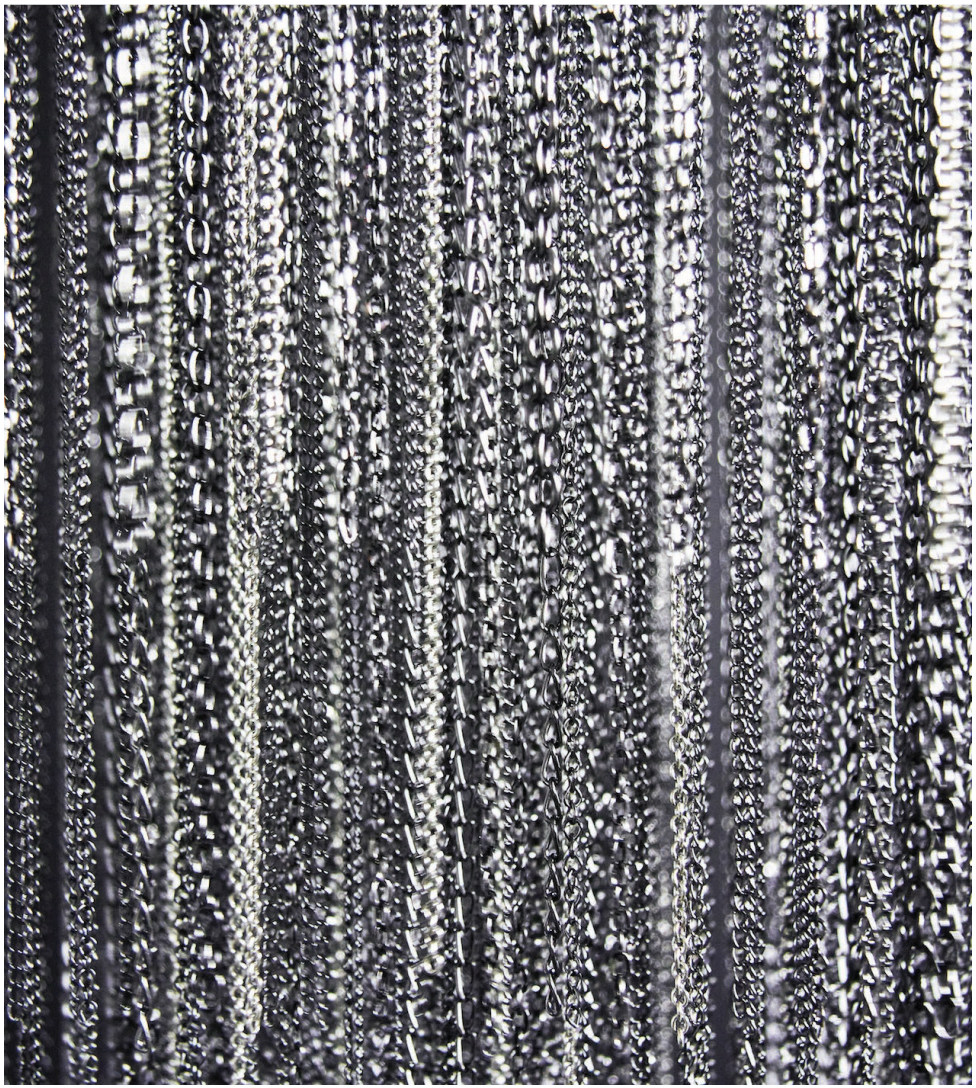

GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

KELLY XL
Chandelier

4/7

Spec sheet

Product name:	Kelly Chandelier
MSRP:	$22,400 USD
Standard Leadtime:	12-14 weeks
Dimensions:	X-Large 74″ x 32″ x 38″ H + stem
Light Source:	110V 15 WATT T5 incandescent bulb (included) OR 12V 3 Watt LED bulb (optional)
Standard Stem Lengths:	6″, 12″ or 18″ (additional lengths are available upon request)
LED driver:	E60R12DC (110V) UVC50TD (220V)
Weight:	X-Large 215 lbs


See Installation guide for installation details

Standard Finishes

Standard finish options:



Blackened Steel



Satin Brass

Standard 5″ Canopy:



Blackened Steel



Satin Brass


GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

KELLY XL
Chandelier

5/7

Standard Dimensions

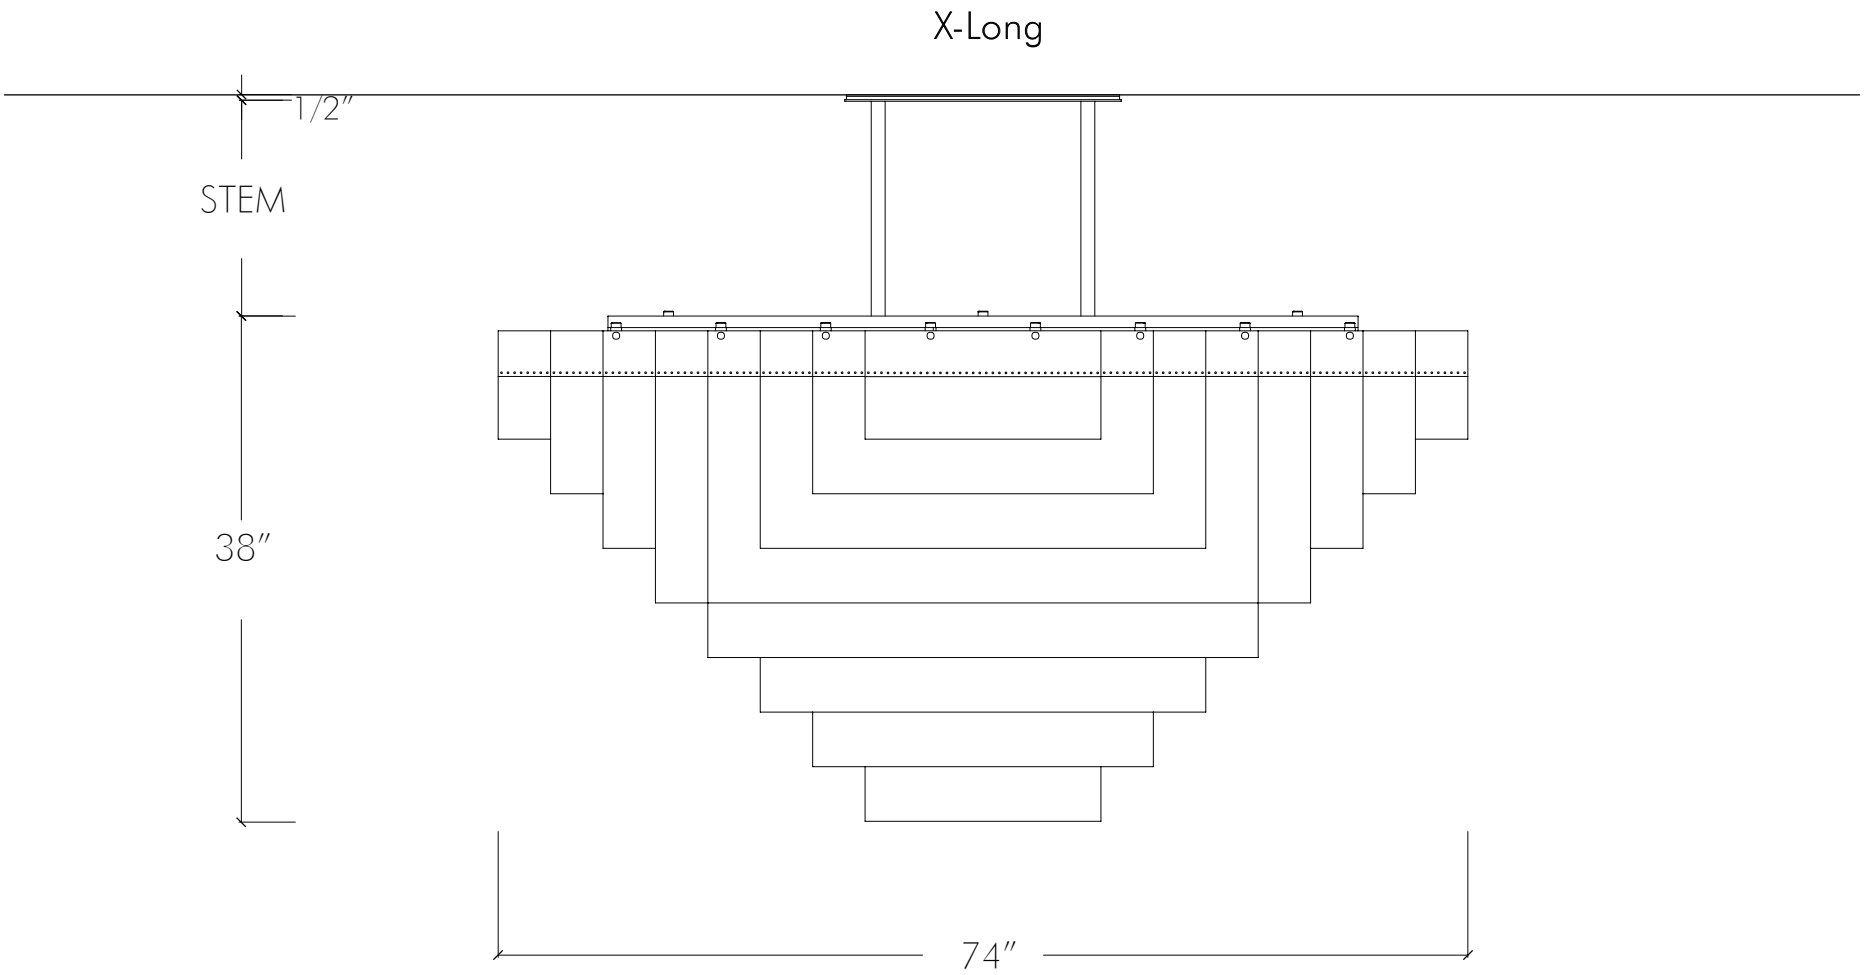

GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

LED DRIVER
E60R12DC 120V

6/7

60W 12V DC LED Driver


Features:

Dimmable with any standard MLV/Incandescent
TRIAC - (Leading edge) dimmer switch
Super compact ALUMINUM CASE
Class 2UL 8750IP67 - Withstands wet and salty conditions
Auto-Reset Protection for short circuits & over-voltage
FCC 15 part 212V DC
True RMS


Specifications:

Max Load	60W
Input Voltage	120V AC
Input Current at Max Load	0.61 A
Output Voltage	12V DC
Output Current at Max load	5A
Power Factor	0.95
Efficiency	> 90 %
Operating Temp.	-20c ~ 70c (-4F ~ 158F)
Overcurrent	Yes
Over temperature	Yes
Open circuit protection	Yes
Input Wires (White / Black)	18 AWG
Output Wires (Red / Black)	14 AWG
Dimensions	4.92" x 1.97" x 0.77"
Weight	9 oz

Magnitude's E60R12DC dimmable voltage LED driver is class 2 rated and designed to operate with any standard MLV/Incandescent TRIAC (Leading edge) dimmer switch. The driver's low profile aluminum case makes it the perfect choice for under cabinet lights, tape lights and various LED fixtures installations. Our electrical specification includes Auto Reset, over current and short circuit protection. Efficiency of 90% and higher allows the driver to operate at low temperatures.

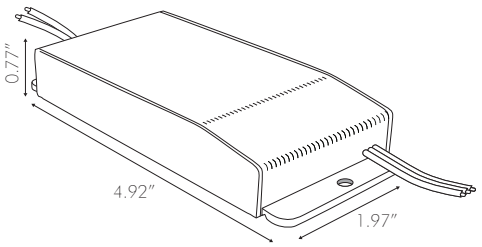



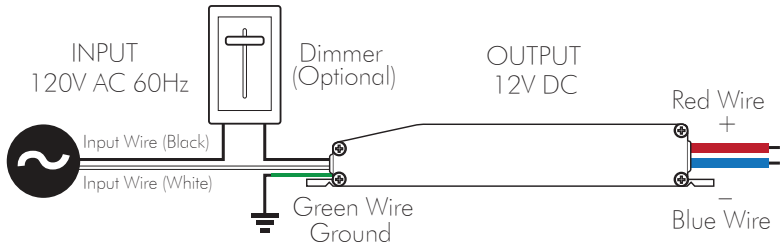

*For smooth dimming 8W minimum load is required

GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com

LED DRIVER
UVC50TD 220V

50W Constant Voltage Triac Dimming LED Driver

Specifications:

Input voltage	220V - 240VAC
Input frequency	50 - 60 Hz
Input current	0.4A
Inrush current	<2.5A
Power factor	0.95
Output load Voltage	12V
Output current	4.16A
Output power	50W
Power factor	>0.95
Efficiency TYP	>80%

Protection:

Overload	Auto recovery
Short circuit	Auto recovery
Over Voltage	Auto recovery

Environment:

Operating temp	-20c – +50c
Storage temp	-40c – +70c
Relative humidity	5 - 95 %

Safety Standard: Design refers to EN60598, EN61547, ENV55024, EN61000-4-2, 3, 4, 6, 8,11, EN61000-3-2, EN61000-3-3


EMI Standard: Meets Emissions to EN55022, EN55015 Class B

Weight: 200g

Features:


Constant voltage output
Fully isolated
Short circuit, over current and over voltage protection up to 80% efficient
Fire resistant plastic cover
Compatible with leading and trailing edge dimmers
20 ~ 100% Dimming Load
10 ~ 100% Dimming range
Mains dimmable
Screw terminals
IP44 design for indoor use
2 years warranty

Mechanical Diagram

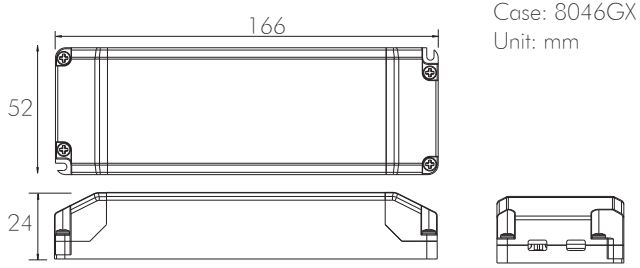

Case: 8046GX
Unit: mm

LED Configuration



GABRIEL SCOTT
est 2012

372 Broome Street, New York, NY 10013
(212) 837-2923 • info@GabrielScott.com
www.GabrielScott.com