lambert&fils



Side A and B



Side A



Side B

SAINTE 08

Sainte is a collection about the forces that anchor us, a suspension light in dialogue with gravity. Reimagining the rectangle in layered, colourful glass, Sainte offers an elegant floating mass supported by robust nylon ribbons. Powered by a flat wire embedded in the nylon, these anchors carry a casual, contemporary spirit: an everyday material flirting with its graceful, minimalist centre. The form can suspend from any angle and height, and in multiples, offering infinite architectures and possibilities. As a collection, it presents a dance of contrasting materials and an equilibrium of opposing powers.

type: suspension

construction:
aluminum polished light block and ceiling anchors
laminated glass body
nylon ribbon
PMMA frosted diffuser

specifications:
source: LED array, integrated
power consumption: 11 W
colour temperature 2700k, 3000k, dim to warm.
see order guide
colour rendering index: ≥90 CRI
colour consistency: 3 SDCM
expected lifetime: 50 000h


control:
120-277V: On/Off, 0-10V, Phase Dimming (120V only)
220-240V: On/Off, 0-10V, Phase Dimming (Trailing Edge only)
refer to our recommended list of dimmer models

ribbon length: 20’ / 610 cm, width: 2” / 5 cm


weight: 42.1 lb / 19.1 kg

certifications: IP20

warranty: 2 years




Canopy
W: 5” / 12.7 cm
L: 7” / 17.8 cm
H: 1.7” / 4.3 cm

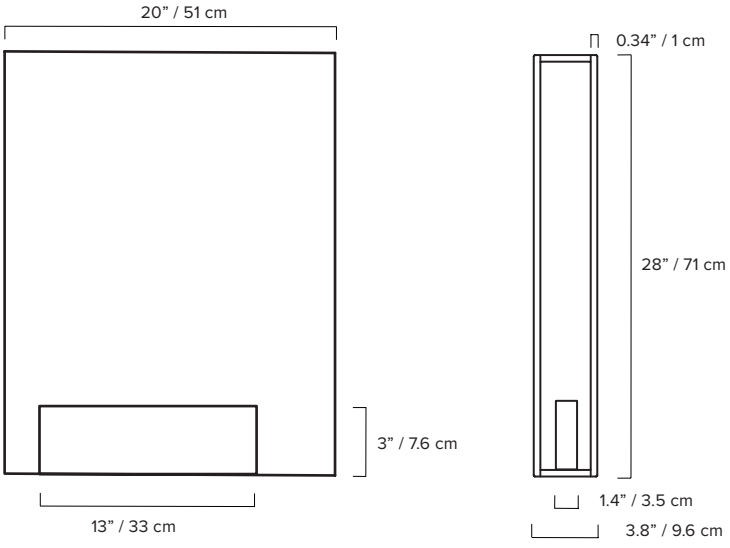

*dimensions are approximate and may vary slightly

lambert&fils

ORDER GUIDE: SKU

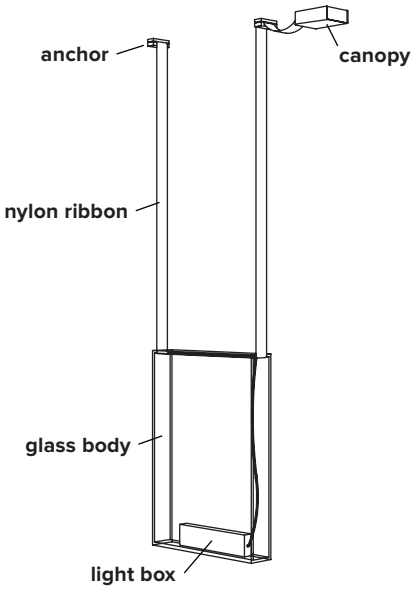


COLLECTION	MODEL	GLASS BODY (Side A and Side B)	
STE sainte	**08**	**YEDY**	yellow, dark yellow
		LGLG	laminated green, laminated green
		MDMD	medium grey, medium grey
		DRFB	dark red, frosted blush
		LPFG	light peach, frosted grey
		***CC**	custom colour

STE **08** **YEDY**

NYLON RIBBON	CANOPY	COLOUR TEMPERATURE (CCT)		CONTROL	
BK black	**BK** black	**WL**	warm light (2700K)	**ZT**	0-10V dimming
	WH white	**NL**	neutral light (3000K)	**OT**	1-10V dimming
		D27	dim to warm (2700K to 2200K)	**PH**	phase dimming
		D30	dim to warm (3000K to 2200K)		
		V	variable		

BK **BK** **WL** **ZT** = **STE08YEDYBKBKWLZT**

example



Top and bottom of glass are always ultraclear and not available in color


GLASS BODY
(*Custom colours available upon request)

NYLON RIBBON

yellow · dark yellow · laminated green · medium grey · dark red · frosted blush · light peach · frosted sand — transparent / translucent

black

MOUNTING OPTIONS

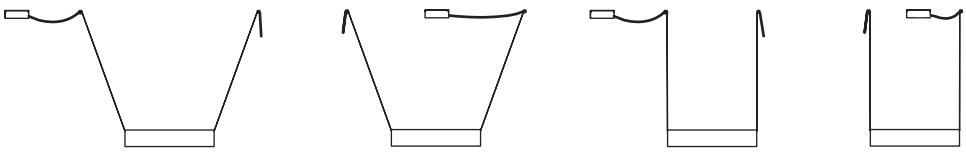

lambert&fils

DIMMER SPECIFICATIONS

TESTED DIMMER COMPATIBILITY LIST - 120V*

Compatible with 0-10V, Phase dimming (leading edge or trailing edge**)

Dimmer brand	Model	Dimmer protocol	Min level	Max level
Lutron	TGCL-153P	Phase dimming	14%	98%
Leviton	VPE06	Phase dimming	14%	98%
Lutron	DVELV303P	Phase dimming	11%	98%
Lutron	SELV300P	Phase dimming	11%	98%
Lightolier	ZP260QEW	Phase dimming	11%	98%
Lutron	FAELV500	Phase dimming	17%	99%
Lutron	MAELV600	Phase dimming	18%	98%

TESTED DIMMER COMPATIBILITY LIST - 230V*

Compatible with 1-10V, Phase dimming (trailing edge only**)


Dimmer brand	Model	Dimmer protocol	Min level	Max level
Clipsal	32E450UDM	Phase dimming	31%	100%
Clipsal	32E450TM	Phase dimming	25%	100%

Some dimmers require a minimum load, check specifications.

*Other dimmers can yield good results and we recommend conducting your own test before final installation

**Leading edge is also known as TRIAC or Forward Phase. Trailing edge is also known as ELV or Reverse Phase.

EU ENERGY LABEL

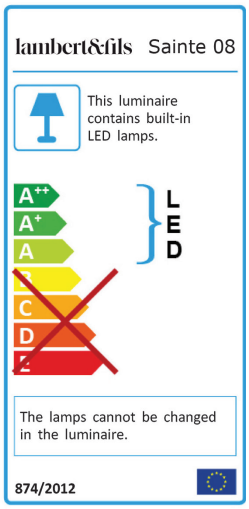

NOTES:

– must be installed by an electrician
– LED may only be changed by Lambert & Fils or other authorized personnel
– not protected against liquids (refer to IP20)
– additional charges for modifications or for special orders
– please refer to maintenance sheet on website for cleaning instructions

Updated: Feb 2020