archiluce



BEAUBIEN

The Beaubien Collection's strong black lines bend in and out of space, moving effortlessly between simplicity and ornamentation. Round and cubic brass connectors complete the lamps' structures and add a rich material contrast to the powder coated rods. The collection's industrial and graphic aesthetic is imbued with a palette of influences, from traditional Chinese screens to the Memphis movement. Each influence strengthens the collection, creating nuance within its timeless character.

type:	ceiling (CE), floor (FL) and wall (WA)
construction:	powder coated steel and aluminum body brass hardware milk glass globe polyester cord, vinyl cord for floor or wall softwire in Australia
specifications:	source: LED lamp provided (G9 base) power consumption: 1 x 4.5W, 4 x 3.5W lumen output: 1573lm colour temperature: 2700K included * 3000K available upon request colour rendering index: 80 CRI standard * ≥ 90 CRI upon request expected lifetime: 25 000h
control:	refer to our recommended list of dimmer models
cord length:	120" / 305 cm footswitch positioned at 60"/ 152 cm from body handswitch positioned at 18"/ 45.7 cm from body
weight:	starting at 7.5 lb / 3.4 kg
certifications:	IP20
warranty:	2 years







*dimensions are approximate and may vary slightly

lambert&fils


FLOOR

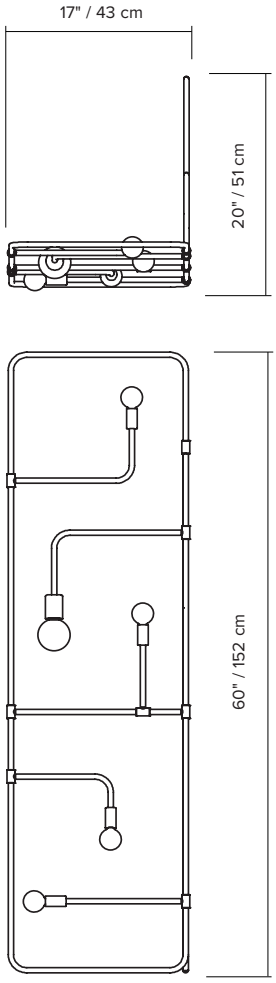

WALL

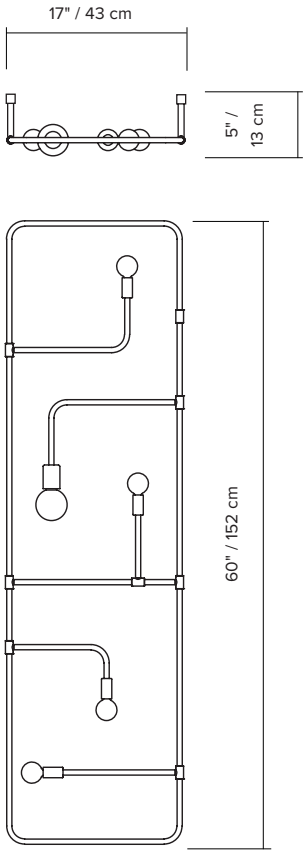

CEILING

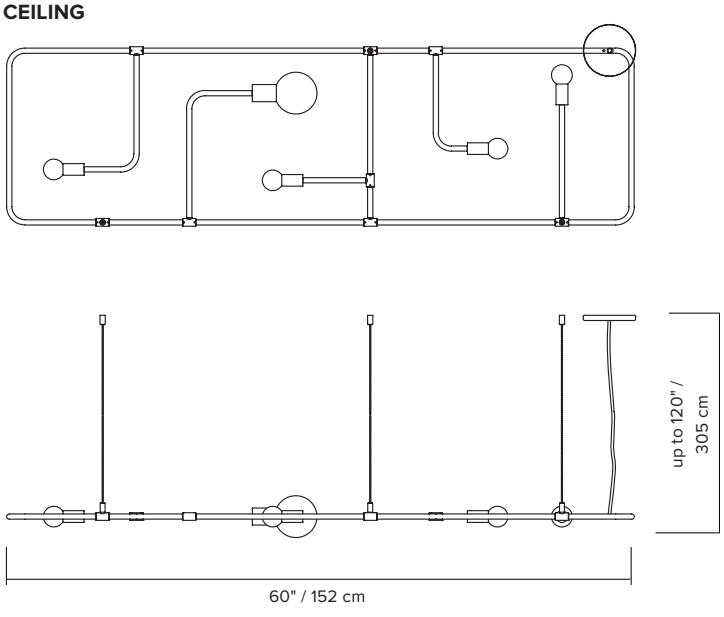

G80 ∅ ±3" / 80 mm


G50 ∅ ±2" / 50 mm

lambert&fils

ORDER GUIDE: SKU

COLLECTION	MODEL	TYPE	FINISH (body/hardware/cord)
BEA beaubien	01	FL floor	BKBR black/brass/black
			BKGR black/graphite/black
			BRBR brass/brass/black
BEA	01	FL	BKBR = BEA01FLBKBR

example

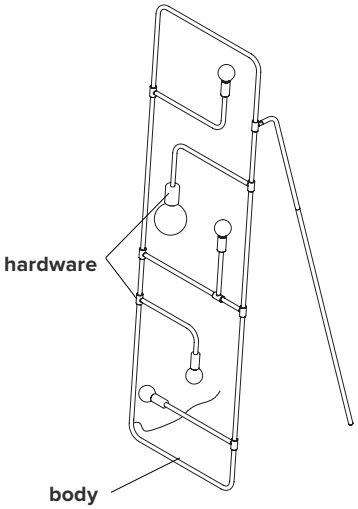

FINISH



flat black | graphite | brass

COLLECTION	MODEL	TYPE	FINISH (body/hardware/cord/canopy)
BEA beaubien	01	CE ceiling	BKBRBKBK black/brass/black/black
			BKBRBKWH black/brass/black/white
			BKGRBKBK black/graphite/black/black
			BKGRBKWH black/graphite/black/white
			BRBRBKBR brass/brass/black/brass
			BRBRBKWH brass/brass/black/white
BEA	01	CE	BKBRBKBK = BEA01CEBKBRBKBK


example

FINISH




flat black | graphite | brass

CANOPY




fat black | flat white | brass

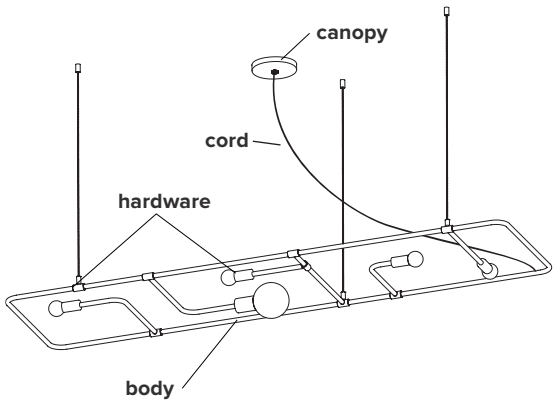

lambert&fils

COLLECTION	MODEL	TYPE	FINISH (body/hardware/cord/canopy)	
BEA beaubien	01	WAHW wall hardwire	BKBRBKBK	black/brass/black/black
			BKBRBKWH	black/brass/black/white
			BKGRBKBK	black/graphite/black/black
			BKGRBKWH	black/graphite/black/white
			BRBRBKBR	brass/brass/black/brass
			BRBRBKBK	brass/brass/black/black
			BRBRBKWH	brass/brass/black/white

BEA **01** **WAHW** **BKBRBKBK** = **BEA01WAHWBKBRBKBK**
example

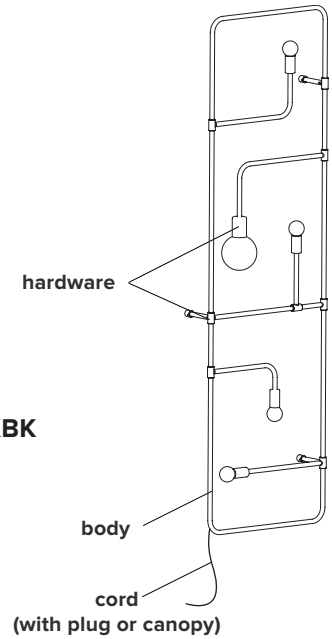

FINISH

flat black | graphite | brass

CANOPY

flat black | flat white | brass

COLLECTION	MODEL	TYPE	FINISH (body/hardware/cord)		SWITCH	
BEA beaubien	01	WASW wall softwire	BKBR	black/brass/black	HD	hand at 18”/ 45.7 cm
			BKGR	black/graphite/black	FT	floor at 60”/ 152 cm
			BRBR	brass/brass/black		

BEA **01** **WASW** **BKBR** **HD** = **BEA01WASWBKBRHD**
example

FINISH

flat black | graphite | brass

NOTES:

– must be installed by an electrician
– not protected against liquids (refer to IP20)
– additional charges for modifications or for special orders
– please refer to maintenance sheet on website for cleaning instructions

lambert&fils

DIMMER SPECIFICATIONS

*Only applicable for the ceiling and wall hardwire models.

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 120V

The dimming technology offering the best results is ELV (electronic low voltage) dimmers with reverse phase or trailing edge control.


DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
LUTRON - MAESTRO	MAELV-600	0%	100%	0%-10%	good
LUTRON - SKYLARK	SELV-300P	0%	100%	no	very good
LUTRON - SKYLARK	SELV-303P	0%	100%	no	very good
LUTRON - SKYLARK	CTELV-303P	0%	100%	no	very good
LUTRON - DIVA	DVELV-300P	0%	100%	no	very good
LEGRAND - ADORNE	TRUE UNIVERSAL	30%	100%	no	good

DIMMER LIST COMPATIBILITY FOR G9 LED BULBS – 230V

DIMMER BRAND	MODEL NUMBER	MIN LEVEL	MAX LEVEL	FLICKERING	OVERALL QUOTE
VARILIGHT	V-PRO	2%	100%	no	very good
LEGRAND - NILOÉ	3 996 35	15%	87%	no	good
NIKO	310-0280X	5%	94%	no	very good
NIKO	310-0190X	1%	100%	no	very good

*Other dimmers can yield good results and we recommend conducting your own test before final installation.

EU ENERGY LABEL

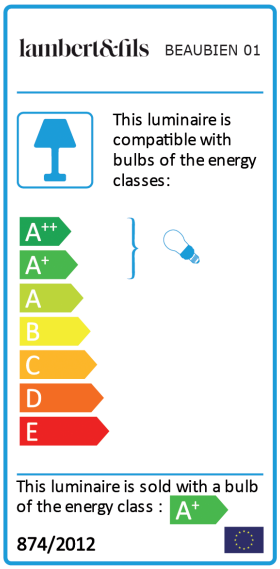

Updated: Feb 2020